

## Low Energy Based Optimization for IoT Applications Using Super Nodes in Sensor Network

Arvind Rawat<sup>1</sup>, Sudhanshu Maurya<sup>2,\*</sup>, Prem Nath<sup>1</sup>, Suraj Panwar<sup>1</sup>

<sup>1</sup> Department of Computer Science & Engineering, HNB Garhwal University Srinagar, Garhwal, India

<sup>2</sup> School of Computing, Graphic Era Hill University, Bhimtal Campus, Uttarakhand, India

(Received 12 June 2023; revised manuscript received 19 August 2023; published online 30 August 2023)

The key contributions to the total consumption of energy are the processes of information detection and management, information exchange. The amount of energy required by the wireless device as a result of communication makes up the greatest share of the overall amount of energy that is spent, despite the fact that efforts to increase energy efficiency concentrate on enhancing the operational modes of the radio module. The Internet of Things need to operate together with the most efficient energy sources in order to increase the lifetime of sensor hubs while simultaneously guaranteeing that the network is accessible and available. The purpose of this paper is to provide a strategy that has been presented with the intention of enhancing the network lifespan of the already available internet of things-based LEACH protocol for wireless sensor networks. Incorporating the ideas of super nodes and advanced nodes into the LEACH protocol's multi-hop algorithm is what this solution calls for. Longer lifespans for wireless sensor networks are going to be achieved via the use of this approach. In the proposed method, the first dead node round number is drastically improved by around 52 %, which increases the network longevity of the IoT-based wireless sensor network.

**Keywords:** LEACH, IoT, Multihop Wireless Sensor Networks, Cluster Head.

DOI: [10.21272/jnep.15\(4\).04028](https://doi.org/10.21272/jnep.15(4).04028)

PACS numbers: 02.50. – r, 89.75. – k

### 1. INTRODUCTION

The widespread adoption of the Internet of Things, which is sometimes referred to by its acronym IoT, is widely regarded as one of the most important developments in terms of information technology that has taken place in the twenty-first century [1]. These sensors are capable of interacting with one another as well as with the sink itself in a number of different ways, including the ones listed above [2]. The Internet of Things is faced with a variety of problems, the most important of which is represented by the limited energy resources that are held inside individual devices. However, despite these challenges, the IoT is expected to become more widespread in the coming years [3]. There are a number of essential components that are required in order to carry out the process of controlling energy consumption, elongating the lifetime of the network, and concurrently guaranteeing that the network is actively participating in all of the required tasks. Robust self-association, clustering, guiding norms, and energy productivity are some of the components that make up this system [4]. The Internet of Things comes with a few drawbacks, one of which is that it has limited buffering capabilities and processing resources. There are also a few more drawbacks. The management of the network's overall power consumption is the primary challenge that is presented by wireless sensor networks (WSNs) [6].

Wireless sensor networks, which are more often referred to as WSNs, offer a broad range of applications that may be used within a number of distinct commercial

markets. One of the most cutting-edge applications that is still being developed is in the field of the Internet of Items (IoT), which enables a broad range of various things or devices to be connected to the internet [7]. This application is still in the process of being developed. This application has not yet completed its development and is currently in the process of being worked on. Wireless sensor networks (WSNs), on the other hand, have a substantial constraint in terms of the amount of power that can be extracted from their batteries [8].

The challenge of minimising the amount of energy that is needed by WSNs may be addressed using a number of different ways, one of which is planning a computation using progressive clustering. This strategy is only one of several that can be utilised. The following are some more strategies: In the current investigation, the current clustering convention for low-energy adaptive clustering hierarchy (LEACH) is altered by presenting an edge limit for group head choice and simultaneously exchanging the force level between the hubs. Both of these modifications are made as part of the LEACH algorithm [9]. Both of these alterations are performed simultaneously with one another. Both of these modifications are carried out in conjunction with one another at the same time. A vast number of modifications have been made as a result of the extensive variety of applications in light of the fact that the LEACH convention is a fundamental computation. A comprehensive examination of LEACH and its progeny can be found in [10].

This analysis takes into account four important variables, including the clustering approach, information

\* [dr.sm0302@gmail.com](mailto:dr.sm0302@gmail.com)

The results were presented at the 3<sup>rd</sup> International Conference on Innovative Research in Renewable Energy Technologies (IRRET-2023)

accumulation, flexible type, and adaptability. According to the LEACH protocol, the CHs that are utilized are selected at random, and the BS does not have access to any information on the residual energy that is created by the network. As a possible solution to this problem, the LEACH-C [11] convention was suggested as a feasible course of action. In order to solve the problem, this solution was implemented. The BS is granted power over all of the choice forces in Filter C, which is an included version of the LEACH convention. If the hub in question is fitted with a global positioning system, then the BS will get information on the location of each hub after each cycle, in addition to the amount of power the hub still has (GPS). The use of GPS, which requires an excessive amount of power to function and is, on top of that, impractical, is the fundamental drawback of this convention, and one of the primary reasons why it is not extensively utilized is because of this weakness [12].

In other words, the use of GPS is the fundamental reason why this convention is not widely utilized. In order to get at their conclusions, the authors of LEACH Deterministic Cluster-Head Selection [13] and Improved-LEACH [14] proposed a different limit by modifying the crude edge equation. This allowed them to access their results. Because of this, they were able to get the outcomes they desired. In [15], it is suggested that the LEACH convention make use of an inclusion safeguarding CH determination computation in order to broaden the scope of the network that is capable of detecting inclusion. This would allow for a larger network that is able to detect inclusion (CPCHSA). It was essential to carry out these steps in order to provide an accurate accounting for the inclusion. One of the limitations of these parameters is that it is impossible to make a forecast that is one hundred percent correct about the number of CHs that will be chosen in each round based on these factors. LEACH-H [16] selects the CHs using an iterative process, which not only ensures that they will be the same from one round to the next but also serves as a strategy for extending the lifespan of the network. The convention cannot be held in networks of significant size; nevertheless, even if it were possible to do so, it would still result in significant administrative expenses [17].

Even so, the convention cannot be held in networks of significant scale. The developers have modified the probability that a sensor hub will become CH depending on the amount of energy produced by the rest of the network, which has allowed them to enhance the CH choice computation that is found in [18]. The expansion of the CH choice computation made this improvement feasible and made it practical to implement. This step is conducted in order to make certain that the computation is carried out with the highest level of precision achievable. This post is going to focus on one strategy that may be used to increase the amount of time a network is able to serve its intended purpose [19, 20].

## 2. IMPLEMENTATION

The filter convention is viewed as the main clustering-

based directing convention to accomplish adaptable arrangements and expand network lifetime. Filter allows minimization of worldwide energy utilization by consistently circulating the network burden to all hubs at various focuses. Commonly, sensor hubs are composed progressively in groups, including a CH for each. The CH is answerable for getting information from hubs of its gathering, conglomerating information reports, and directing them to the sink hub. Utilizing LEACH, a hub is chosen to CH when its likelihood, characterized by an arbitrary number picked somewhere in the range of 0 and 1, is not exactly a particular limit. The remainder of the hubs join a specific bunch or cluster by picking the CH that can be come to with the least correspondence energy. The job of CH turns every one of the sensors to forestall depleting the battery of a solitary sensor. Basic implementation of proposed model is shown in Fig. 1.

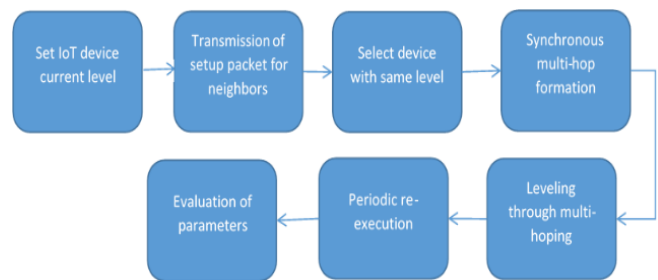


Fig. 1 – Basic Implementation/Methodology of proposed model

Drain convention is viewed as the primary clustering-based directing convention to accomplish versatile arrangements and expand network lifetime. Drain allows minimization of worldwide energy use by consistently conveying the network burden to all hubs at various focuses. Regularly, sensor hubs are sorted out progressively in groups, including a CH for each. The CH is liable for social occasion information from hubs of its gathering, collecting information reports, and directing them to the sink hub. Utilizing LEACH, a hub is chosen to CH when its likelihood, characterized by an irregular number picked somewhere in the range of 0 and 1, is not exactly a particular limit. The remainder of the hubs join a specific bunch or cluster by picking the CH that can be come to with the least correspondence energy. The job of CH turns every one of the sensors to forestall depleting the battery of a solitary sensor.

A multi-hop directing instrument from lower levels toward more elevated levels. Information moves from hubs to their relating CH and afterward continuously to lower-level CHs until arriving at the CH in level 1 which advances information to the sink hub. In the arrangement stage, in the wake of choosing CHs in each level utilizing Equation 2, all bunch or cluster heads communicate publicize bundles with most extreme transmission power utilizing CSMA. In the group development step, every hub picks the nearest bunch or cluster head in a similar level, in view of the RSSI of the promotion parcels and sends a warning to join an objective group. Be that as it may, when

the hub does not get the CH commercial bundles from a similar level, it checks to get a CH promotion from some other level (I). For this situation, the hub changes its present level to level (I). Additionally, when no CH ad is gotten, the hub totals information straightforwardly to the sink. During the group arrangement step, the multi-hop association step happens where each CH picks its nearest CHs at lower levels, in view of the RSS of the CH commercial parcels. It at that point sends a warning to join this CH. In the event that the CH doesn't get any CH commercial from lower levels, it sends accumulations straightforwardly to the sink. This guarantees the network will be progressively mindful in case of hub disappointments. The bunch or cluster arrangement step and multi-hop association happens synchronously, all the while to spare time and energy. Clustering, leveling, and multi-hop directing procedures are acquainted in our methodology with limit the ghost of allotments. These procedures ought to be re-executed intermittently to re-compose the WSN, as far as capacity and level of hubs and number and measurement of gatherings.

In the consistent state stage, each bunch or cluster head makes a TDMA plan for all hubs joined the group and the CHs at the more elevated level. Every part hub transmits information during its own timeslot and diminishes the energy utilization by entering rest mode during the remaining timeslots. The CH totals the information got from different hubs inside the group and sends it to the sink or to the more significant level CH. Toward the finish of each round, the sink peruses the leftover energy in every hub in the network and finds the energy rate to utilize it for round time figuring.

### 3. RESULTS

The results of the MATLAB-based implementation of the Internet of Things-based LEACH protocol of wireless sensor networks are addressed in this section of the paper.

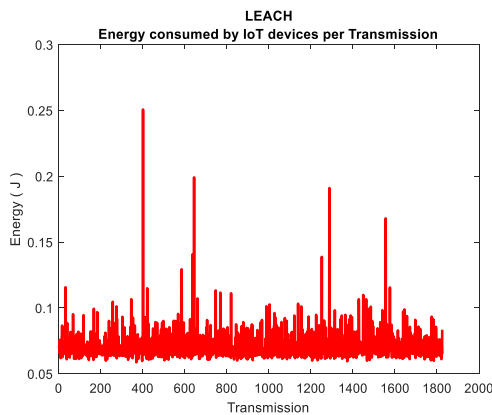


Fig. 3 – Energy Consumed

To begin, the results of prior implementations that are already accessible are presented for the purpose of improving understanding and making comparisons. These results are already in the public domain. The average amount of energy used is extremely near to being equal to

zero. In terms of amperes, it is within the range of microwatts. In addition, Fig. 3 illustrates the amount of energy that is used up by IoT devices during many transmissions.

The Fig. 4 shown here represents the typical amount of energy used and transmitted. The operational nodes of the Internet of Things reveal (Fig. 5 and 6) below that transmissions may reach up to 13000, which is a significant increase compared to that of the existing results. The amount of energy that was used by the broadcasts is detailed below in Fig. 7.

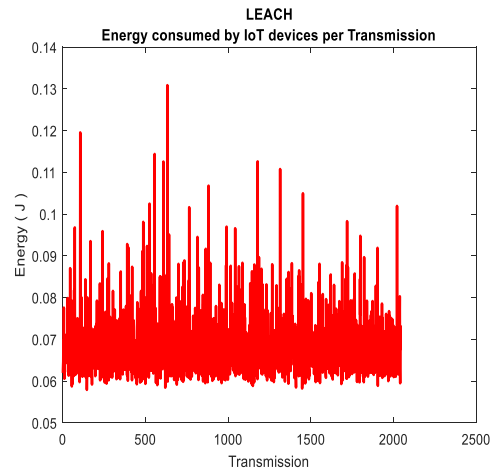


Fig. 4 – Energy consumed

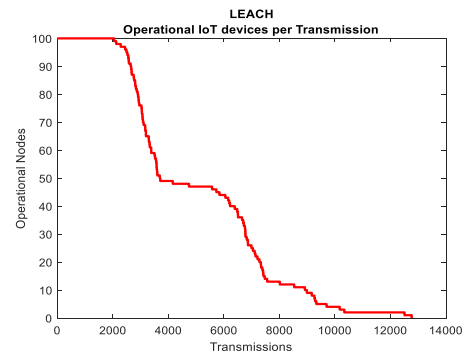


Fig. 5 – IoT node transmissions

According to the Fig. 8 and Fig. 9 that can be seen below, there are around 6500 different communications happening at any one time because of the operation IoT nodes.

The operational nodes are shown to be active in the picture above until around the number 12000.

The comparison of the findings i.e Average Energy Consumption (AEC) and Dead Node Round Number (DNRN) received in two different cycles that were acquired from the outputs may be found in the Table 1.

Methods such as AN and MH, in addition to the IoT LEACH approach that was recommended, are among the most successful tactics.

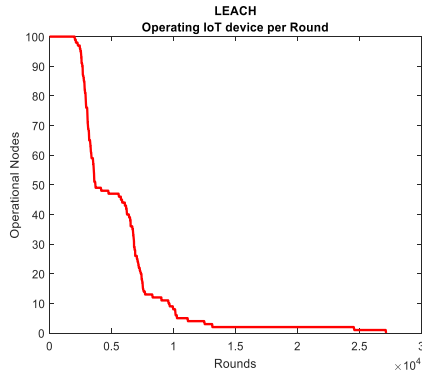


Fig. 6 – Node vs Round Number

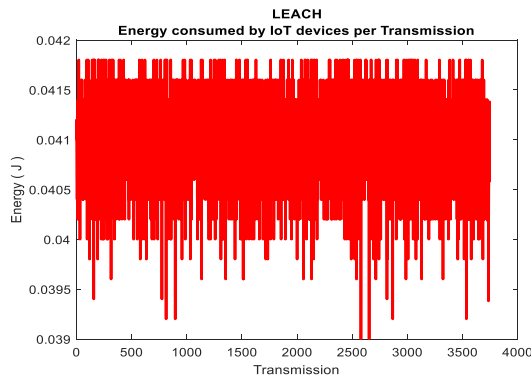


Fig.7- Energy Transmission

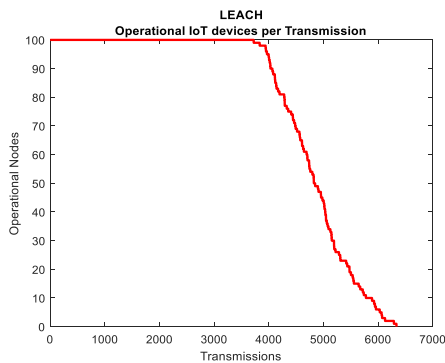


Fig. 8 – Operational Nodes

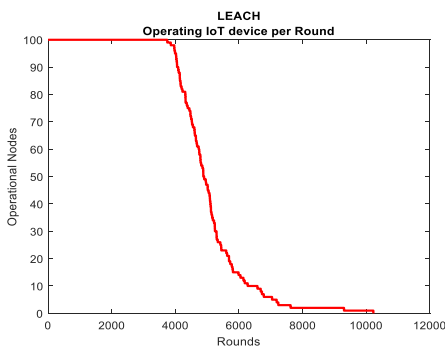


Fig. 9 – Transmission Operational Nodes

The total average amount of energy that is used is at its lowest with the proposed IoT LEACH with AN MH. The IoT LEACH combination that has been suggested, which combines AN and MH, has the highest possible round number in the Dead node.

Table 1 – Output

Cycle 1	IoT LEACH	Proposed IoT LEACH with AN	Proposed IoT LEACH with AN MH
AEC	$2.29 \cdot 10^{-4}$	$3.55 \cdot 10^{-4}$	$2.20 \cdot 10^{-4}$
DNRN	1857	2225	3902
Cycle 2			
AEC	$3.08 \cdot 10^{-4}$	$2.81 \cdot 10^{-4}$	$2.20 \cdot 10^{-4}$
DNRC	1879	1922	3810

4. CONCLUSION

A significant amount of research has been conducted in order to accomplish the objective of building a directing convention for WSN that is effective. This is because energy and lifespan are two important restrictions that must be considered throughout the design process. The process of selecting a directed computation that is effective in terms of the amount of energy that it consumes and that also distributes the heap in a way that is consistent throughout the network may be a difficult one. Even though the drain convention makes the calculation more flexible, it does place certain limitations on the process. The improved guiding approach may deliver higher results for homogeneous network setups when compared to LEACH. This allows it to be used to applications such as ecological monitoring via the utilisation of IoT.

Enhancement of the network lifespan of the already existing LEACH protocol for wireless sensor networks based on the internet of things through the incorporation of the ideas of super nodes and advanced nodes into the multi-hop algorithm for the LEACH protocol. This was accomplished by integrating the concepts of super nodes and advanced nodes into the LEACH protocol.

The execution of the recommended method results in an increase in the round number of the first dead node by a significant amount (about 52 %), which leads to an improvement in the network lifetime of the IoT-based wireless sensor network. The strategy that has been recommended keeps the normal amount of energy utilised to a minimal so that it may save as much as possible. The anticipated lifetime of the system's network has been increased to somewhere between 12 000 and 16 000, which are also round values.

## REFERENCES

1. Trupti Mayee Behera, Umesh Chandra Samal, Sushanta Kumar Mohapatra, *IET Wireless Sensor Systems* 8 No 5, 223 (2018).
2. Trupti Mayee Behera, Sushanta Kumar Mohapatra, Umesh Chandra Samal, Mohammad. S. Khan, Mahmoud Daneshmand, Amir H. Gandomi, *IEEE Internet of Things Journal* 6 No 3, 5132 (2019).
3. Zhihui Wang, Ruokun Wu, Qila Sa, Jinlin Li, Yuejiao Fan, Wenbo Xu and Yiqun Zhao, *Information Management and Network Security* (CIMNS: 2016).
4. Arun Kumar Rana, Sharad Sharma, *International Journal of Engineering and Advanced Technology (IJEAT)* 9 No 1, 4418 (2019).
5. M. Ashwini, N. Rakesh, *International Conference on Inventive Systems and Control (ICISC-2017)* (2017).
6. Neha Rani, Pardeep Kumar, *International Journal of Engineering and Advanced Technology (IJEAT)* 8 No 6, 2122 (2019).
7. Abdul Wasay Mudasser, Shaik Mohammed Rasool, Shah Aqueel Ahmed Abdul Gafoor, *International Journal of Innovative Technology and Exploring Engineering (IJITEE)* 8 No 7S2 (2019).
8. Yang Liu, Qiong Wu, Ting Zhao, Yong Tie, Fengshan Bai and Minglu Jin, *Sensors* 19, 4579 (2019).
9. Anshu Prakash Murdan, *Journal of Electrical Engineering, Electronics, Control and Computer Science – JEECCS* 4 No 14, 1 (2018).
10. N. Thilagavathi, V. Swetha, A. Aishwariya, *IOSR Journal of Engineering (IOSRJEN)* 09 No 5, S (III), 12 (2019).
11. M. Sasikala, *International Journal of Computer Science and Mobile Computing* 6 No 11, 43 (2017).
12. Nilofer Saik, Krishna Patteti, *International Journal of Pure and Applied Mathematics* 118 No 14, 371 (2018).
13. Shalli Rani, Rajneesh Talwar, Jyoteesh Malhotra, Syed Hassan Ahmed, Mahasweta Sarkar, Houbing Song, *Sensors* 15, 28603 (2015)
14. Mais Sami Ali, Abdulkareem Abdulrahman Kadhim, *International Journal of Mobile Network Communications & Telematics (IJMNCT)* 9 No 2 (2019).
15. Babar Ali, Tariq Mehmood, Mohumad Abbas, Muzamil Hussain, *IJCSNS International Journal of Computer Science and Network Security* 19 No 6, 18 (2019).
16. Latifah Munirah Kamarudin, R. Badlishah Ahmad, *International Journal of Sensor Networks* 21 No 1, 16 (2016).
17. Aditya Tandon, *International Journal of Recent Technology and Engineering (IJRTE)* 8 No 1 (2019).
18. B. Monica, K. Rajkumar, K.R. Sekar, R. Manikandan, K. Bagyalakshmi, *International Journal on Emerging Technologies* 10 No 1, 59 (2019).
19. Kabeer Khan, Abdul Waris, Hamayun Safi, *International Journal of Scientific Research in Computer Science, Engineering and Information Technology* 1 No 1, 7 (2016).
20. Ravi Kumar Poluru, Shaik Naseera, *Journal of Engineering Science and Technology Review* 10 No 5, 50 (2017).

### Оптимізація на основі низьких витрат енергії для додатків IoT з використанням супервузлів у сенсорній мережі

Arvind Rawat<sup>1</sup>, Sudhanshu Maurya<sup>2</sup>, Prem Nath<sup>1</sup>, Suraj Panwar<sup>1</sup>

<sup>1</sup> Department of Computer Science & Engineering, HNB Garhwal University Srinagar, Garhwal, India

<sup>2</sup> School of Computing, Graphic Era Hill University, Bhimtal Campus, Uttarakhand, India

Ключовий внесок у загальне споживання енергії становлять процеси виявлення та управління інформацією, обмін інформацією. Кількість енергії, необхідної бездротовому пристрою на зв'язок, становить найбільшу частку від загальної кількості витраченої енергії, незважаючи на те, що зусилля з підвищення енергоефективності зосереджені на покращенні режимів роботи радіомодуля. Інтернет речей повинен працювати разом з найефективнішими джерелами енергії, щоб збільшити термін служби сенсорних концентраторів, одночасно гарантуючи, що мережа доступна та доступна. Метою цієї статті є надання рекомендацій, які були представлені з наміром збільшити тривалість роботи мережі вже доступного протоколу LEACH на основі Інтернету речей для бездротових сенсорних мереж. Включення ідей супервузлів і розширених вузлів в алгоритм протоколу LEACH з кількома переходами – це те, чого вимагає це рішення. За допомогою цього підходу буде досягнуто більшої тривалості роботи бездротових сенсорних мереж. У запропонованому методі число взаємодій першого мертвого вузла значно покращується приблизно на 52%, що збільшує довговічність бездротової сенсорної мережі на основі IoT.

**Keywords:** LEACH, IoT, Бездротові сенсорні мережі з кількома переходами, Голова кластера.